

Time and hours meters electronic

Count input for PNP, NPN or AC logic

Display LCD, 7-digits, coded time range

ISI34



ISI34 - Hour counter

Features

- Time and hour counter
- Time range 99999 h 59 min / 99999.99 h

Technical data - electrical ratings

Voltage supply	Lithium battery (approx. 8 years at 20 °C)
Display	LCD, 7-segment display
Display illumination	24 VDC \pm 20 %, 50 mA
Number of digits	7-digits
Digit height	8 mm
Function	Hour counter
Count mode	Adding
Control	NPN, PNP, Pulses 10...260 VAC/VDC
Reset	Button and electric
Keylock	Yes, electric (keylock)
Emitted interference	DIN EN 61000-6-4
Interference immunity	DIN EN 61000-6-2
Programmable parameters	Time range
Approval	UL/cULus

Technical data - mechanical design

Ambient temperature	-10...+60 °C
Storage temperature	-20...+70 °C
Relative humidity	80 % non-condensing
Core cross-section	2.5 mm ² fine wire AWG 12
Protection DIN EN 60529	IP 65 (face with seal)
Housing type	Built-in housing
Housing colour	Deep grey, RAL 7021
Dimensions W x H x L	48 x 24 x 48 mm
Mounting depth	47.7 mm
Mounting type	Clip frame or screw mount
Cutout dimensions	45 x 22.2 mm (+0.3)
Weight approx.	50 g

GRUPO ELECTROSÓN

Time and hours meters electronic

Count input for PNP, NPN or AC logic

Display LCD, 7-digits, coded time range

ISI34

Type table

Without backlit With backlit	ISI34.010AA01 ISI34.010AB01	ISI34.011AA01 ISI34.011AB01	ISI34.013AA01 ISI34.013AB01
Version	NPN	PNP	AC/DC
Brief description	Time in: - Hours and minutes - Hours and 1/100 h	Time in: - Hours and minutes - Hours and 1/100 h	Time in: - Hours and minutes - Hours and 1/100 h
Signal input INP A	–	–	Timer AC/DC
Signal input INP B	Timer NPN	Timer PNP	External Reset AC/DC
Operating mode	99999 h 59 min or 99999.99 h	99999 h 59 min or 99999.99 h	99999 h 59 min or 99999.99 h

GRUPO ELECTROSÓN

**Count input for PNP, NPN or AC logic
Display LCD, 7-digits, coded time range**

ISI34

Part number

ISI34.01

	A		01
--	----------	--	-----------

- Display
 - A Without backlit
 - B With backlit
- Design
 - 0 NPN
 - 1 PNP
 - 3 AC/DC

Connection diagram

Time and hours meters electronic

Count input for PNP, NPN or AC logic

Display LCD, 7-digits, coded time range


ISI34

Trigger level


Input	Input circuit	Reset input for DC-Version	
NPN input	Comparator (pin 2)	NPN reset input	Pin 3
Input level Low	0...0.7 VDC	Input level Low	0...0.7 VDC
Input level High	3...30 VDC	Input level High	3...30 VDC
Input resistance	1 MΩ	Input resistance	2,2 MΩ
		Min. pulse time	50 ms
PNP input	Comparator (pin 2)	NPN control inputs	Pin 4 + 5
Input level Low	0...0.7 VDC	Input level Low	0...0.7 VDC
Input level High	4...30 VDC	Input level High	3...5 VDC
Input resistance	100 kΩ	Input resistance	2.2 MΩ
AC/DC inputs	Optocoupler (pin 1 + 3)		
Input level Low	0...2 VAC/VDC		
Input level High	10...260 VAC/VDC		
Input resistance	160 kΩ		
Min. pulse time	16 ms		

Dimensions

ISI34

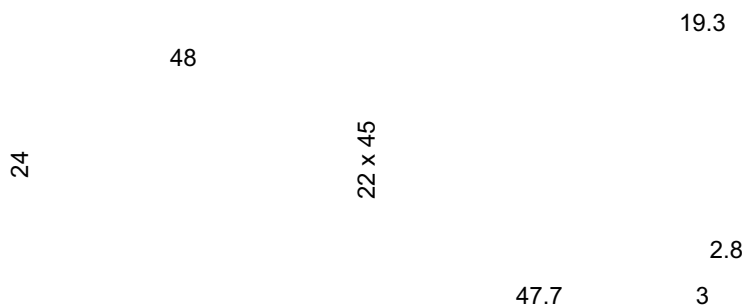

Front frame for screw/clip mount (included with delivery)

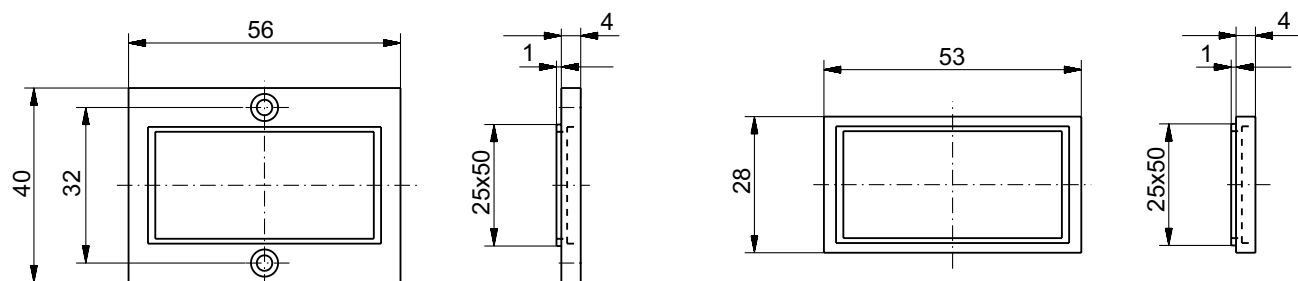

GRUPO ELECTROSÓN